
## ABS 12-24

DUAL-VOLT ABS ABS 12 ... 24V to 24V



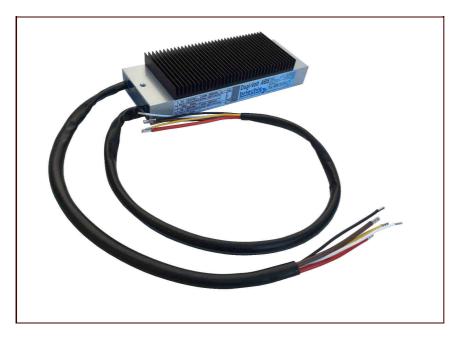

Special converter for the supply of 24V anti block system out of 12V or 24V

- \* input voltage 12V and 24V
- \* high power for additional functions like EBS and level control
- \* compact size by high efficiency
- \* simple mounting by inserting into cable line (5-pole cable)
- \* info-module works properly
- \* electronical protection against reverse polarity without short circuit
- \* protection against overload
- \* reverse voltage proof independent from polarity

input voltage:

9...33V DC both lines

output voltage:

27V +-5%

(27...32V if input above 27V) output current line (term. 15):

0 ... 500mA

output current line (term. 30):

0...10A

(15A /20% on time cycle) connection:

input and output cables are sealed in, open endings

app. 350mm input and output

dimensions:

cable length:

200x70x40mm without cabel outlet

mechanical protection:

entierly sealed (IP69K)

total efficiency:

app. 80%

mass:

app. 950g

Order Info:

ABS 12-24

Fax +49(0)8282/89485-38