


FP 12-2

Flash-Prevent
Prevents effectively the flashing of
LED lamps.

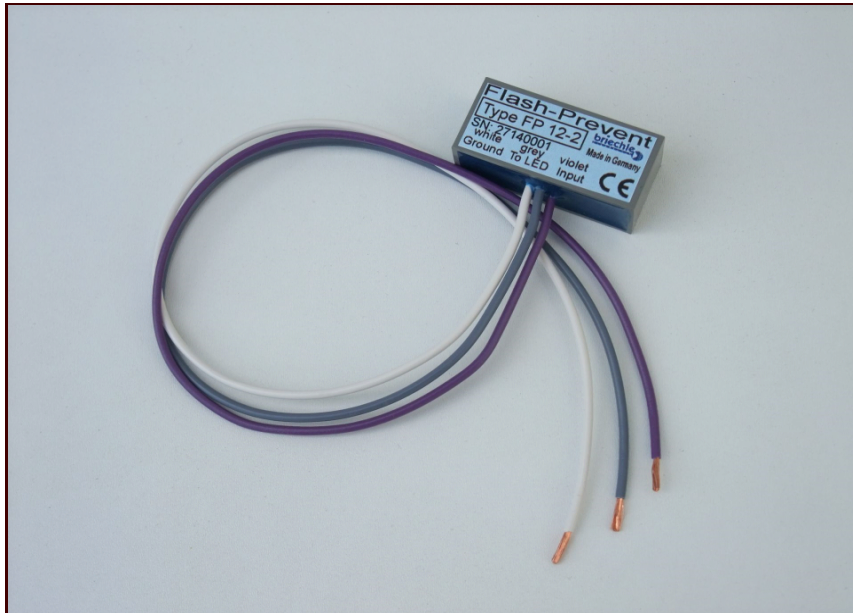

Flash-Prevent prevents effectively the inadmissible flashing of LED lamps caused by the vehicles pulsed cold scan. ("hard" and short pulse ab. 10ms). The failure of an LED will be monitored. Attention! Flash-Prevent does not replace LED-ADAPT. Please ask for details.

- * **Effectively prevents flashing of LED lamps**
- * **The failure detection stays in function**
- * **Easy installation due to compact dimensions**
- * **Easy installation ahead of the LED lamps**
- * **Completes LED-ADAPT in combined monitoring**

Operation voltage	12V nominal
Output current	LED (max 0,4A)
Connection input	strand with bare wire ends
Connection output	strand with bare wire ends
Load limitation	within 0-50ms cold filament
Cable length input	0.30 m
Cable length output	0.30 m
Temperature range	-40 ... +75°C
Mechanical protection	entirely sealed (IP69K)
Dimensions	40 x 18 x 15 mm without cable outlet
Mass	approx. 27g
Failure monitor LEDs	integrated

Order Info:

FP 12-2